


# KNOWN

## COLLECTION

### Wood Floor Specification Sheet

## 5/8" Engineered European Oak - Reactive

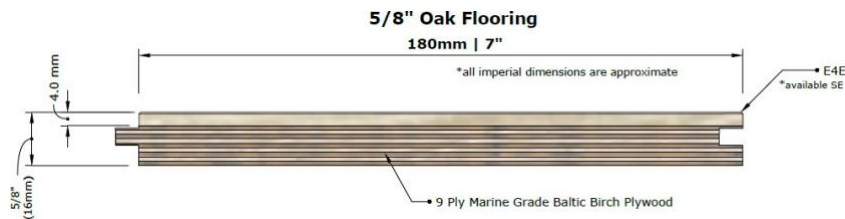

Quercus Robor is sourced from managed forests by our FSC certified mill in Europe. Logs are French Cut and the lamellas are graded to our custom specification. The sawn lamellas are bonded to an exterior grade Baltic Birch substrate, precision milled, filled as necessary, and sanded smooth.

<b>Janka Hardness:</b>	1360
<b>Grade Options:</b>	Prime or Light Rustic
<b>Plank Width Options:</b>	7" (180mm)    Custom
<b>Standard Lengths:</b>	2' – 10' (600mm – 3000mm)    2'-8' (Rustic Only)    Custom
	<small>*All Imperial Dimensions Are Approximate</small>
<b>Thickness Options:</b>	5/8" (16mm) with 4mm Wear Layer
<b>Profile:</b>	Tongue + Groove & End Matched
<b>Edges:</b>	Eased Edge 4 Sides

<b>Core:</b>	Engineered, Marine Grade (Exterior Grade) Baltic Birch Plywood
<b>Adhesive:</b>	Top Layer Lamination – Cold Press, Exterior Grade Multibond SK-8 (i.e. – Titebond III Wood Glue) Plywood – Phenolic by Dynea, Exterior Grade Product Contains No Added Urea Formaldehyde (NAUF) CARB ACTM Phase II Compliant (□ 0.05PPM Formaldehyde)

<b>Finish Options:</b>	UV Bona Polyurethane    UV Cured Oil    UV Cured Hardwax    Unfinished
<b>Treatment Options:</b>	Wire Brush (Light, Medium, or Heavy) Smoked (Fumed) Reactive Hand Scraped Custom Distressed Fire Treatment (ASTME 84)

<b>Floor Score:</b>	SCS-FS-6135
<b>FSC:</b>	Available Upon Request
<b>ANSI Accredited:</b>	ISO/IEC 17065
<b>Indoor Air Quality Cert:</b>	SCS-EC10.3-2014v4.0

<b>Warranties:</b>	Structural – Lifetime Warranty. See documentation or contact your representative
<b>Installation:</b>	Follow NWFA + Manufacturer Guidelines for Installation + Environmental Conditions