


KNOWN

COLLECTION

Wood Floor Specification Sheet

American Walnut | Select Grade

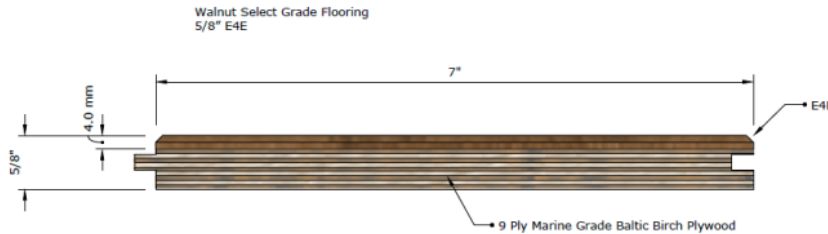

Juglans Negra sourced from managed domestic forests, rough sawn, and kiln dried to 6%-9%. The timber is then graded to our custom specification and sawn to lamellas by our partner mills. Our walnut specification allows for sap, but efforts are taken to remove sap in the grading process. The lamellas are bonded to an exterior grade Baltic birch substrate, precision milled, filled as necessary, and sanded smooth

Janka Hardness:	1010
Dimensions:	5/8" x 7" x 2'-8'+
Grade:	Select Grade
Wear Layer:	4mm Sawn Wear Layer
Profile:	Tongue + Groove & End Matched
Edges:	Eased Edge 4 Sides

Core:	Engineered, Marine Grade (Exterior Grade) Baltic Birch Plywood
Adhesive:	Top Layer Lamination – Cold Press - Exterior Grade Plywood – Phenolic by Dynea, exterior grade Product contains No Added Urea Formaldehyde (NAUF) CARB ACTM Phase II Compliant (< 0.05PPM Formaldehyde)

Finish Options:	UV Bona Polyurethane II UV Cured Oil II UV Cured Hardwax II Unfinished
Treatment Options:	Wire Brush (Light) Hand Scraped Custom Distressed Fire Treatment (ASTME 84)

FSC:	Available upon request
-------------	------------------------

Warranties:	Structural – Lifetime Warranty. See documentation or contact representative.
Installation:	Follow NWFA and manufacturer guidelines for installation and environmental conditions.